



RoHS  
compliant

# Specification:


Material:  
 Contact Material: Brass  
 Contact plating: Au or Sn Over 50μ" Ni  
 Insulator Material: Black Polyester UL94V-0  
 Standard: LCP+30%G.F

Electrical:  
 Current rating: 3.0Amps/contact max.  
 Contact resistance: ≤20mΩ/contact  
 Insulation resistance: ≥1000MΩ at V=100V  
 Withstanding Voltage: 550V AC/minute

Mechanical:  
 Mechanical life cycle: min.200  
 Operating temperatures: -45°C to +105°C  
 Soldering temperature: 260°C, 5s.

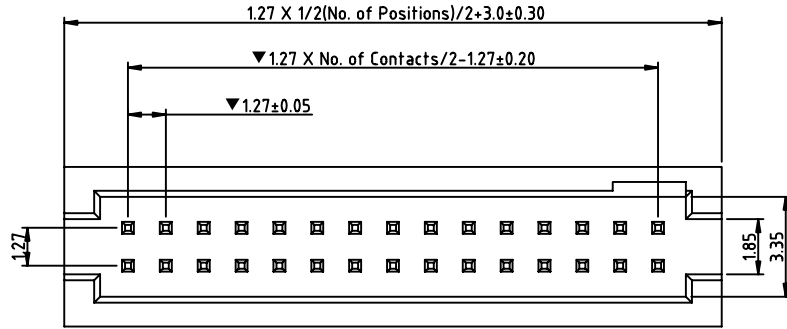

Recommended P.C.B  
 Layout(±0.05)

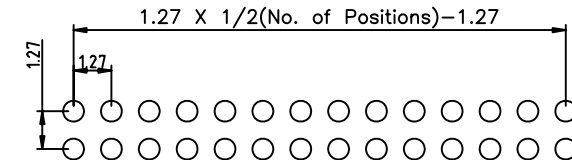

## Ordering Information

BH127057D - 2XX X X 01

No. of pins  
2\*3-2\*32

Plating Option  
 A = Gold Flash  
 B = 3U" Gold  
 C = 5U" Gold  
 E = 15U" Gold  
 T = Tin  
 Z = Special

Insulator Material  
 Option  
 A = PBT  
 B = PA6T  
 F = LCP  
 Z = Special

Packing Option  
 A = Tray  
 B = Bag  
 C = Tube  
 Z = Special

# TM-LINK

TM-Link Technology Limited

TITLE:		1.27mm Box Header Dual row Dip type					
TOLERANCES UNLESS OTHERWISE SPECIFIED:	DRAWN	Robert	DATE:	2012-03-28	DRAWING NO.:	BH127057D-2XX-01	
X.XX ±0.25	CHECKED	Jhon	PROJECTION				
X.X ±0.35	APPROVED	Jack	SIZE:	A4	UNIT:	MM	
X. ±0.50			SCALE:	1:1	SHEET:	1/1	
X.X° ±2°			REV:	A			
X.° ±3°							