




RoHS compliant

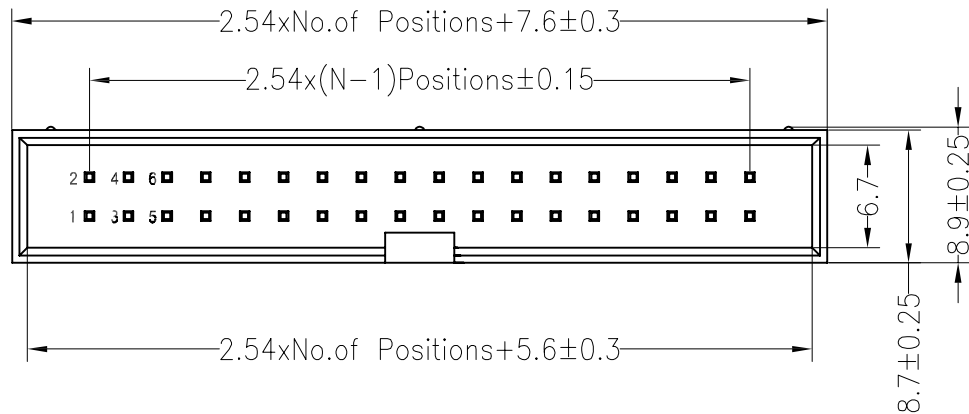


**SPECIFICATIONS**

Rated Current:3.0AMP  
 Contact Resistance:20mΩ Max  
 Withstand Voltage:1000V AC/DC  
 Insulation Resistance:1000MΩ Min  
 Operation Temperature:-40°c to +105°c

Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:Polyester(UL94V-0)  
 Standard: PBT  
 Max.Processing Temp: 180°C for 30-60 seconds  
 (200°C for 10 seconds)

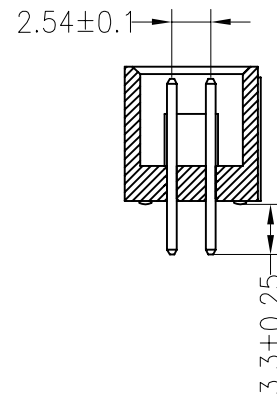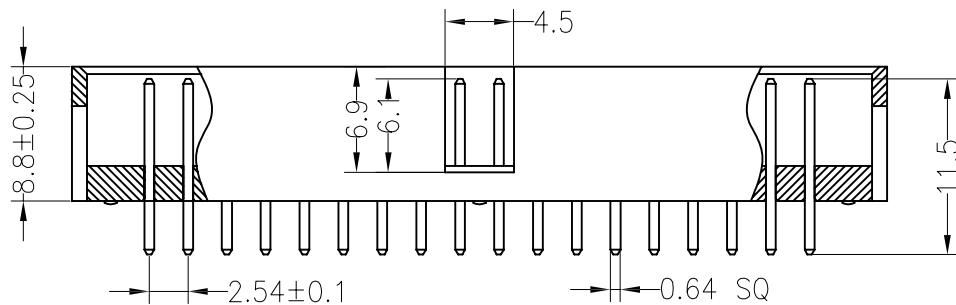

Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)

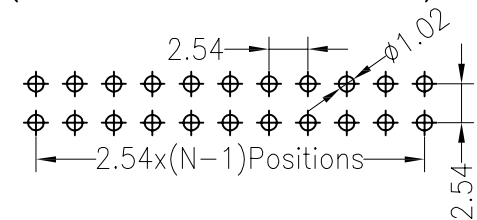

**Ordering Information**

BH254088D - 2XX X X X 01

No. of pins  
2\*3-2\*32

Plating Option  
 A = Gold Flash  
 B = 3U" Gold  
 C = 5U" Gold  
 E = 15U" Gold  
 T = Tin  
 Z = Special

Insulator Material  
 Option  
 A = PBT  
 B = PA6T  
 F = LCP  
 Z = Special

Packing Option  
 A = Tray  
 B = Bag  
 C = Tube  
 Z = Special

**TM-LINK**

TM-Link Technology Limited

TITLE: 2.54mm Box Header H8.8mm 180°									
TOLERANCES UNLESS OTHERWISE SPECIFIED:		DRAWN	Robert	DATE:	2012-03-28	DRAWING NO.:	BH254088D-2XX-01		
X.XX	±0.25	X.X°	±2°	CHECKED	Jhon	PROJECTION			
X.X	±0.35	X.°	±3°	APPROVED	Jack	SIZE:	A4	UNIT:	MM
X.	±0.50					SCALE:	1:1	SHEET:	1/1
						REV:		A	