




RoHS
compliant

Specification:


Material:
 Contact Material: Brass
 Contact plating: Au or Sn Over 50μ" Ni
 Insulator Material: Black Polyester UL94V-0
 Standard: LCP+30%G.F

Electrical:
 Current rating: 1.0Amps/contact max.
 Contact resistance: $\leq 20m\Omega$ /contact
 Insulation resistance: $\geq 1000M\Omega$ at V=100V
 Withstanding Voltage: 550V AC/minute

Mechanical:
 Mechanical life cycle: min.200
 Operating temperatures: -45°C to +105°C
 Soldering temperature: 260°C, 5s.

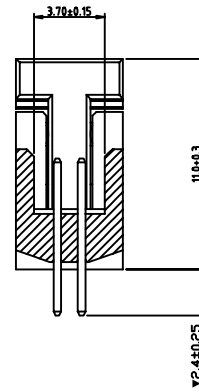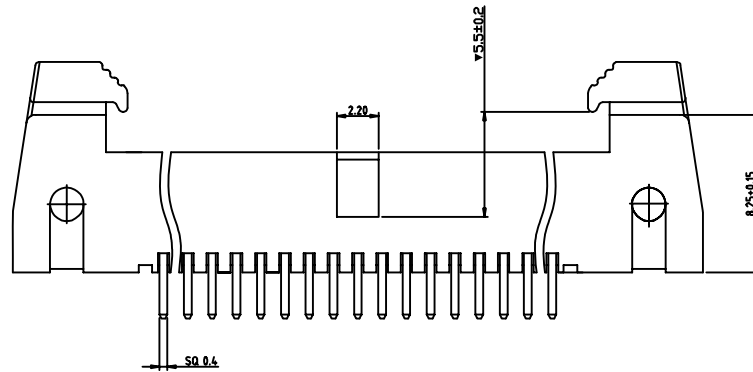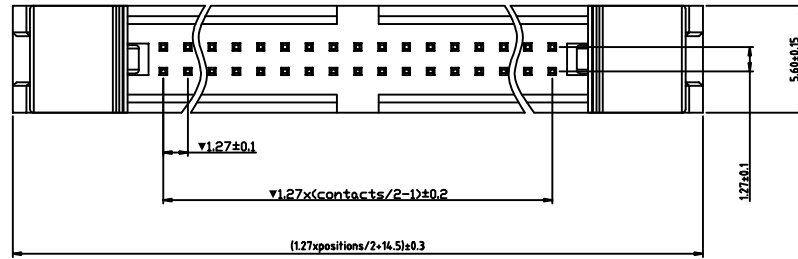

Recommended P.C.B
 Layout(±0.05)

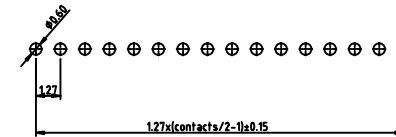

Ordering Information

EH127110DS - 2XX X X X 01

No. of pins
2*3-2*32

Plating Option
 A = Gold Flash
 B = 3U" Gold
 C = 5U" Gold
 E = 15U" Gold
 T = Tin
 Z = Special

Insulator Material
 Option
 A = PBT
 B = PA6T
 F = LCP
 Z = Special

Packing Option
 A = Tray
 B = Bag
 C = Tube
 Z = Special

TM-LINK

TM-Link Technology Limited

TITLE: 1.27mm Ejector Header Dual row Dip type

TOLERANCES UNLESS OTHERWISE SPECIFIED:		DRAWN	Robert	DATE:	2012-03-28	DRAWING NO.:	EH127110DS-2XX-01										
X.XX	±0.25	CHECKED	Jhon	PROJECTION													
X.X	±0.35			APPROVED	Jack			SIZE:	A4	UNIT:	MM	SCALE:	1:1	SHEET:	1/1	REV:	A
X.	±0.50							X.X°	±2°	X.°	±3°						