
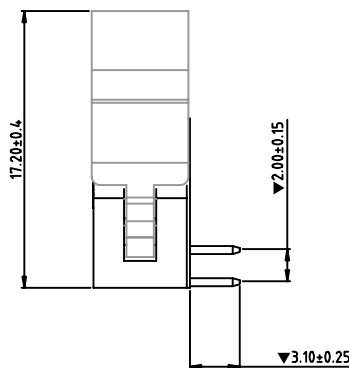
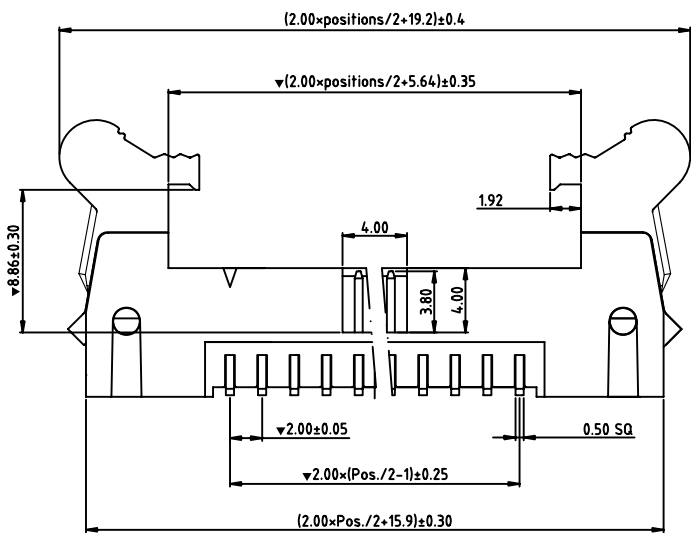


RoHS
compliant

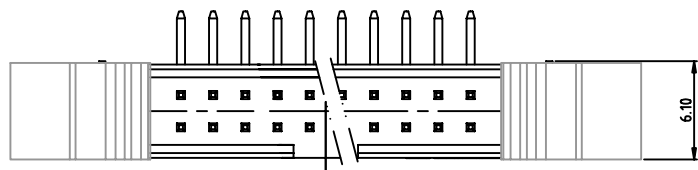


Specification:

Material:
 Contact Material: Brass
 Contact plating: Au or Sn Over 50μ" Ni
 Insulator Material: Black Polyester UL94V-0
 Standard: LCP+30%G.F

Electrical:
 Current rating: 1.5Amps/contact max.
 Contact resistance: $\leq 20\text{m}\Omega$ /contact
 Insulation resistance: $\geq 1000\text{M}\Omega$ at V=100V
 Withstanding Voltage: 550V AC/minute

Mechanical:
 Mechanical life cycle: min.200
 Operating temperatures: -45°C to +105°C
 Soldering temperature: 260°C, 5s.

Recommended P.C.B
 Layout (± 0.05)

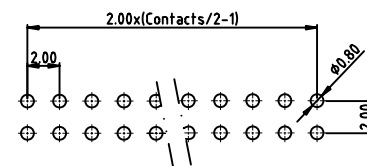

Ordering Information

EH200172RS - 2XX X X X 01

No. of pins
2*5-2*25

Plating Option
 A = Gold Flash
 B = 3U" Gold
 C = 5U" Gold
 E = 15U" Gold
 T = Tin
 Z = Special

Insulator Material
 Option
 A = PBT
 B = PA6T
 F = LCP
 Z = Special

Packing Option
 A = Tray
 B = Bag
 C = Tube
 Z = Special

TM-LINK

TM-Link Technology Limited

TITLE: 2.00mm Ejector Header Dual row Right angle Short Latch

TOLERANCES UNLESS OTHERWISE SPECIFIED:		DRAWN	Robert	DATE:	2012-03-28	DRAWING NO.:	EH200172RS-2XX-01
X.XX	± 0.25	CHECKED	Jhon	PROJECTION			
X.X	± 0.35	APPROVED	Jack	SIZE:	A4	UNIT:	MM
X.	± 0.50			SCALE:	1:1	SHEET:	1/1
	X.X° $\pm 2^\circ$					REV:	A
	X.° $\pm 3^\circ$						