RoHS compliant

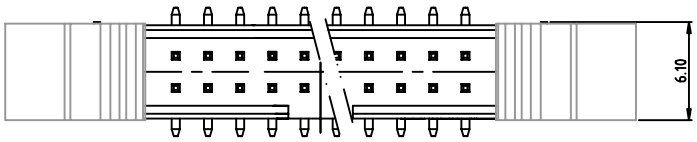

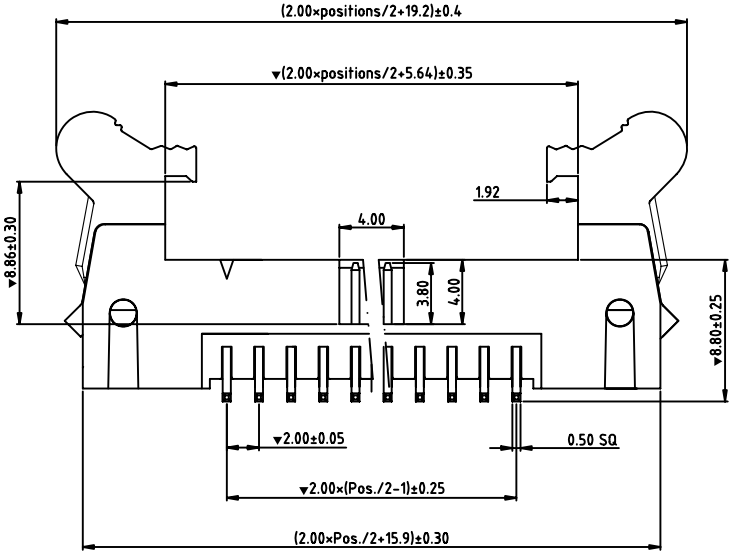



Specification:

Material:
Contact Material: Brass
Contact plating:Au or Sn Over 50μ" Ni
Insulator Material:Black Polyester UL94V-0
Standard:LCP+30%G.F

Electrical:
Current rating: 1.5Amps/contact max.
Contact resistance: ≤20mΩ/contact
Insulation resistance: ⩾1000MΩ at V=100V
Withstanding Voltage:550V AC/minute

Mechanical:
Mechanical life cycle:min.200
Operaing temperatures: -45˚C to+105˚C
Soldering temperature: 260˚C, 5s.

Recommended P.C.B
Layout(±0.05)



Ordering Information

EH200172SS - 2XX X X X 01

No. of pins	Plating Option	Insulator Material Option	Packing Option
2*5-2*25	A = Gold Flash B = 3U" Gold C = 5U" Gold E = 15U" Gold T = Tin Z = Special	A = PBT B = PA6T F = LCP Z = Special	A = Tray B = Bag C = Tube Z = Special

TM-LINK TM-Link Technology Limited

TITLE: 2.00mm Ejector Header Dual row SMT Short Latch

TOLERANCES UNLESS OTHERWISE SPECIFIED:							
X.XX ±0.25 X.X ±0.35 X. ±0.50	X.X° ±2° X.° ±3°	DRAWN	Robert	DATE: 2012-03-28	DRAWING NO.: EH200172SS-2XX-01		
		CHECKED	Jhon	PROJECTION			
		APPROVED	Jack	SIZE: A4	UNIT: MM	SCALE: 1:1	SHEET: 1/1 REV: A