
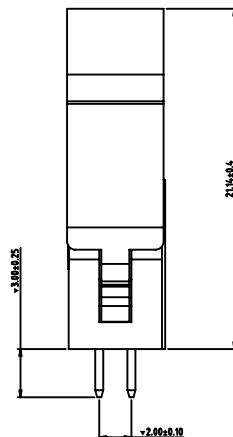
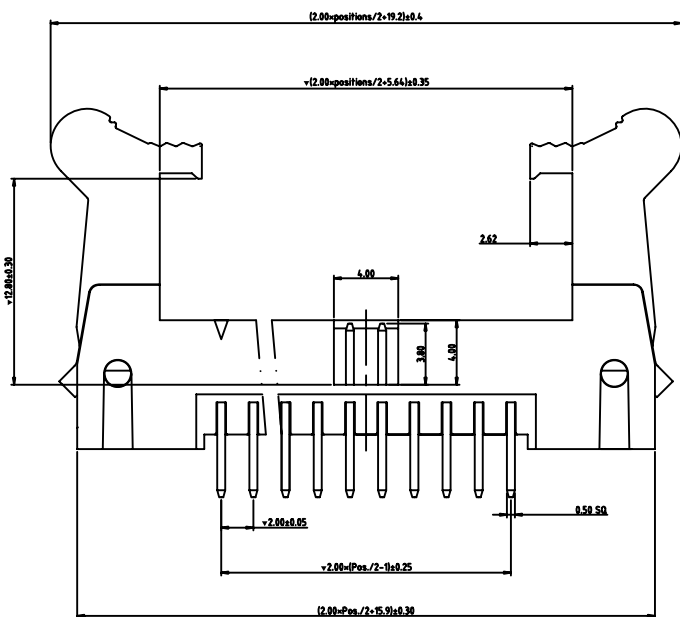


RoHS  
compliant

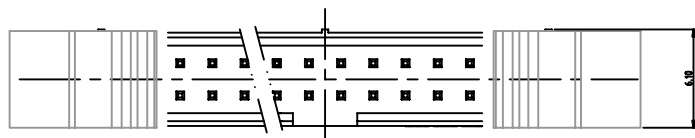


# Specification:

Material:  
 Contact Material: Brass  
 Contact plating: Au or Sn Over 50μ" Ni  
 Insulator Material: Black Polyester UL94V-0  
 Standard: LCP+30%G.F

Electrical:  
 Current rating: 1.5Amps/contact max.  
 Contact resistance: ≤20mΩ/contact  
 Insulation resistance: ≥1000MΩ at V=100V  
 Withstanding Voltage: 550V AC/minute

Mechanical:  
 Mechanical life cycle: min.200  
 Operating temperatures: -45°C to +105°C  
 Soldering temperature: 260°C, 5s.

Recommended P.C.B  
 Layout(±0.05)

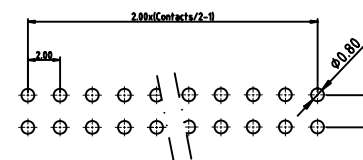

## Ordering Information

EH2002114DL - 2XX X X X 01

No. of pins  
2\*5-2\*25

Plating Option  
 A = Gold Flash  
 B = 3U" Gold  
 C = 5U" Gold  
 E = 15U" Gold  
 T = Tin  
 Z = Special

Insulator Material  
 Option  
 A = PBT  
 B = PA6T  
 F = LCP  
 Z = Special

Packing Option  
 A = Tray  
 B = Bag  
 C = Tube  
 Z = Special

# TM-LINK

TM-Link Technology Limited

TITLE: 2.00mm Ejector Header Dual row Dip type Long Latch

TOLERANCES UNLESS OTHERWISE SPECIFIED:		DRAWN	Robert	DATE:	2012-03-28	DRAWING NO.:	EH2002114DL-2XX-01										
X.XX	±0.25	CHECKED	Jhon	PROJECTION													
X.X	±0.35			APPROVED	Jack			SIZE:	A4	UNIT:	MM	SCALE:	1:1	SHEET:	1/1	REV:	A
X.	±0.50							X.X°	±2°	X.°	±3°						