

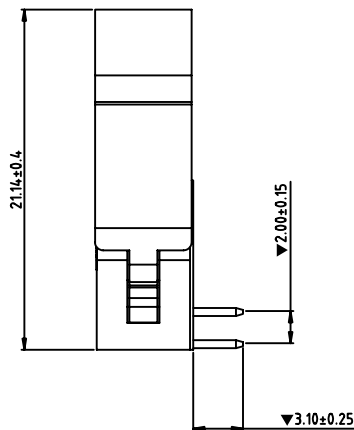
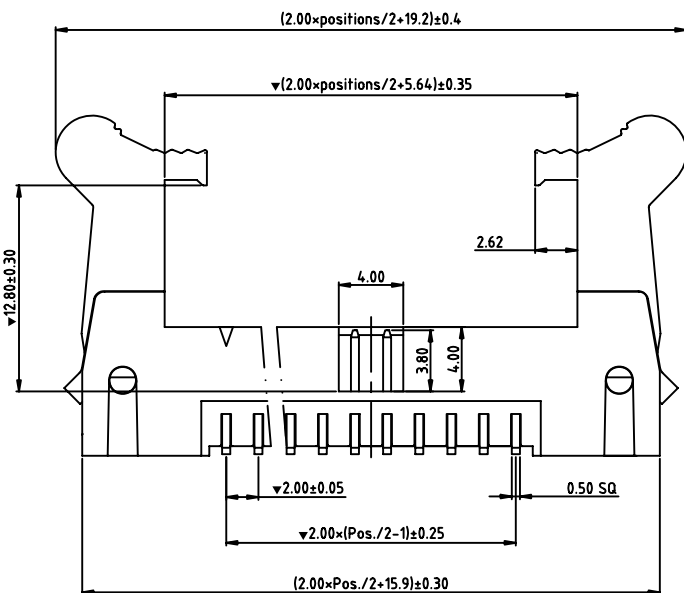


RoHS
compliant

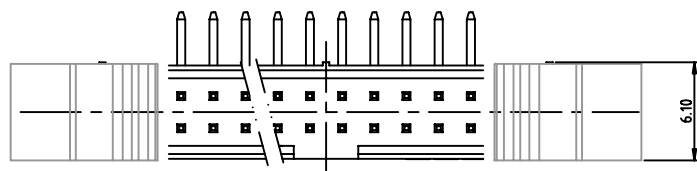

Recommended P.C.B
Layout(±0.05)

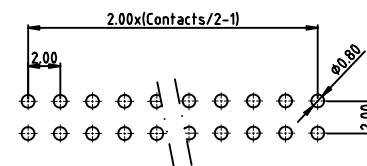

Specification:

Material:

Contact Material: Brass

Contact plating: Au or Sn Over 50μ" Ni

Insulator Material: Black Polyester UL94V-0

Standard: LCP+30%G.F

Electrical:

Current rating: 1.5Amps/contact max.

Contact resistance: ≤20mΩ/contact

Insulation resistance: ≥1000MΩ at V=100V

Withstanding Voltage: 550V AC/minute

Mechanical:

Mechanical life cycle: min.200

Operating temperatures: -45°C to +105°C

Soldering temperature: 260°C, 5s.

Ordering Information

EH2002114RL - 2XX X X 01

No. of pins
2*5-2*25

Plating Option
A = Gold Flash
B = 3U" Gold
C = 5U" Gold
E = 15U" Gold
T = Tin
Z = Special

Insulator Material
Option:
A = PBT
B = PA6T
F = LCP
Z = Special

Packing Option
A = Tray
B = Bag
C = Tube
Z = Special

TM-LINK

TM-Link Technology Limited

TITLE: 2.00mm Ejector Header Dual row Right angle Long Latch

TOLERANCES UNLESS OTHERWISE SPECIFIED:		DRAWN	Robert	DATE:	2012-03-28	DRAWING NO.:	EH2002114RL-2XX-01			
X.XX	±0.25	CHECKED	Jhon	PROJECTION						
X.X	±0.35			APPROVED	Jack	SIZE:	A4		UNIT:	MM
X.	±0.50					SCALE:	1:1		SHEET:	1/1
X.X°	±2°									
X.°	±3°									