



RoHS
compliant

Specification:


Material:
 Contact Material: Brass
 Contact plating: Au or Sn Over 50µ" Ni
 Insulator Material: Black Polyester UL94V-0
 Standard: LCP+30%G.F

Electrical:
 Current rating: 1.5Amps/contact max.
 Contact resistance: ≤20mΩ/contact
 Insulation resistance: ≥1000MΩ at V=100V
 Withstanding Voltage: 550V AC/minute

Mechanical:
 Mechanical life cycle: min.200
 Operating temperatures: -45°C to +105°C
 Soldering temperature: 260°C, 5s.

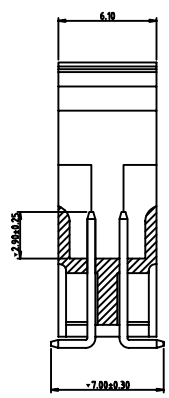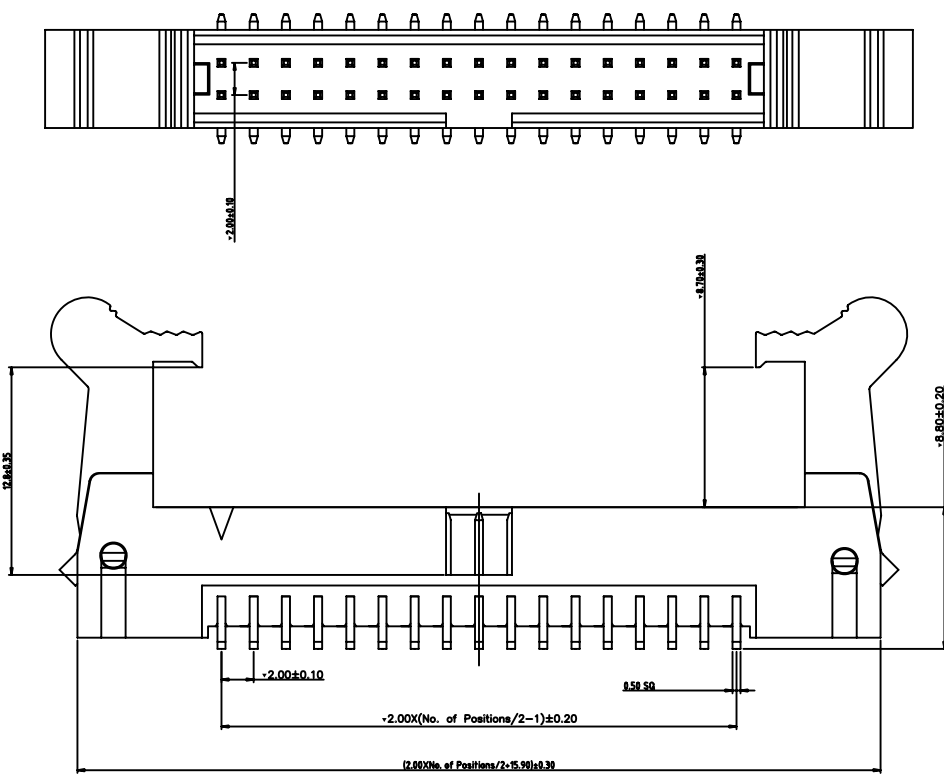

Recommended P.C.B
Layout(±0.05)



Ordering Information

EH2002114SL - 2XX X X X 01

- No. of pins
2*5-2*25
- Plating Option
A = Gold Flash
B = 3U" Gold
C = 5U" Gold
E = 15U" Gold
T = Tin
Z = Special
- Insulator Material
Option
A = PBT
B = PA6T
F = LCP
Z = Special
- Packing Option
A = Tray
B = Bag
C = Tube
Z = Special

TM-LINK

TM-Link Technology Limited

| | | | | | | | |
|--|-------|-------|--------|----------|------------|--------------|--|
| TITLE: 2.00mm Ejector Header Dual row SMT Long Latch | | | | | | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | DRAWN | Robert | DATE: | 2012-03-28 | DRAWING NO.: | EH2002114SL-2XX-01 |
| X.XX | ±0.25 | X.X° | ±2° | CHECKED | | Jhon | PROJECTION |
| X.X | ±0.35 | X.° | ±3° | APPROVED | | Jack | SIZE: A4 UNIT: MM SCALE: 1:1 SHEET: 1/1 REV: A |
| X. | ±0.50 | | | | | | |