

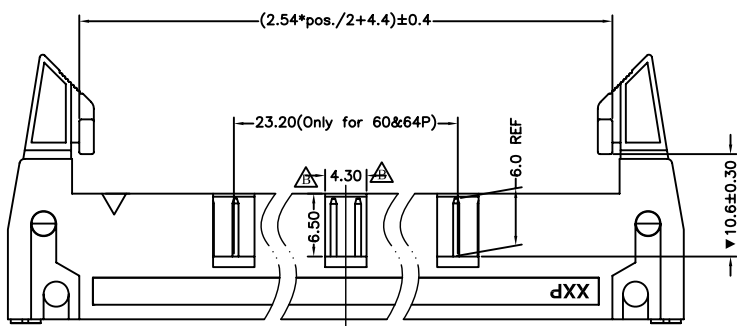


RoHS compliant

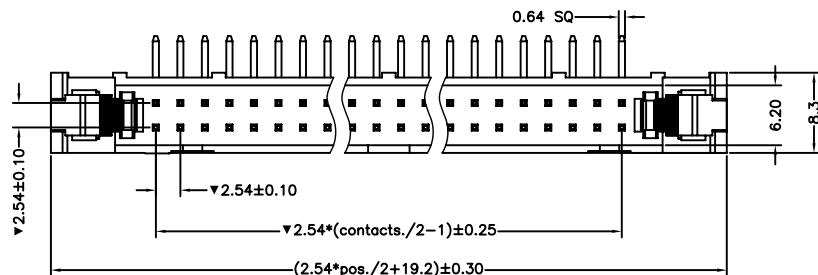


Specification:

Material:
 Contact Material: Brass
 Contact plating: Au or Sn Over 50μ" Ni
 Insulator Material: Black Polyester UL94V-0
 Standard: LCP+30%G.F

Electrical:
 Current rating: 3.0Amps/contact max.
 Contact resistance: ≤20mΩ/contact
 Insulation resistance: ≥1000MΩ at V=100V
 Withstanding Voltage: 550V AC/minute

Mechanical:
 Mechanical life cycle: min.200
 Operating temperatures: -45°C to +105°C
 Soldering temperature: 260°C, 5s.

Recommended P.C.B
 Layout (±0.05)

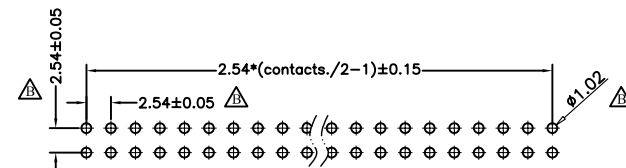

Ordering Information

EH254277RS - 2XX X X X 01

No. of pins 2*5-2*25	Plating Option A = Gold Flash B = 3U" Gold C = 5U" Gold E = 15U" Gold T = Tin Z = Special	Insulator Material Option A = PBT B = PA6T F = LCP Z = Special	Packing Option A = Tray B = Bag C = Tube Z = Special
-------------------------	---	---	--

TM-LINK

TM-Link Technology Limited

TITLE: 2.54mm Ejector Header Dual row Right angle Short Latch

TOLERANCES UNLESS OTHERWISE SPECIFIED:		DRAWN	Robert	DATE:	2012-03-28	DRAWING NO.:	EH254277RS-2XX-01
X.XX	±0.25	CHECKED	Jhon	PROJECTION			SCALE: 1:1 SHEET: 1/1 REV: A
X.X	±0.35			X.X°	±2°		
X.	±0.50	APPROVED	Jack	SIZE:	A4	UNIT:	MM