

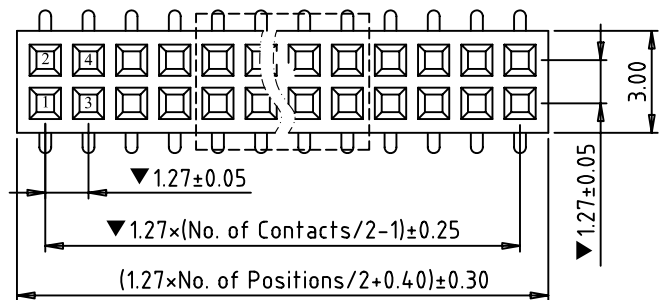
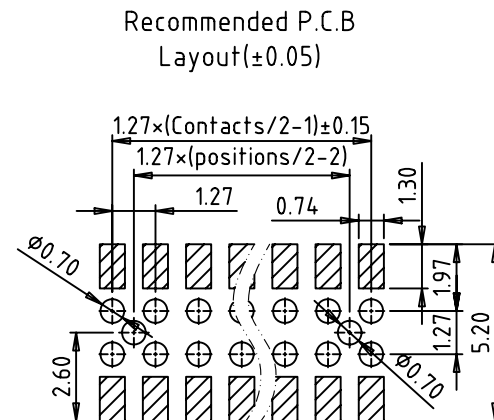


RoHS compliant

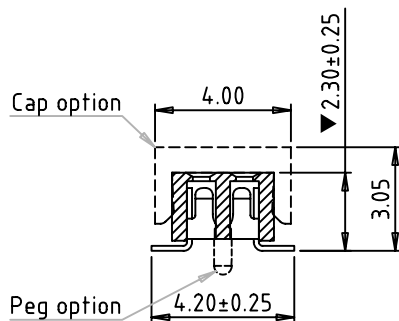

No. of positions	dim. L
$\geq 2 \times 4P$	5.1
$2 \times 2P / 2 \times 3P$	2.5

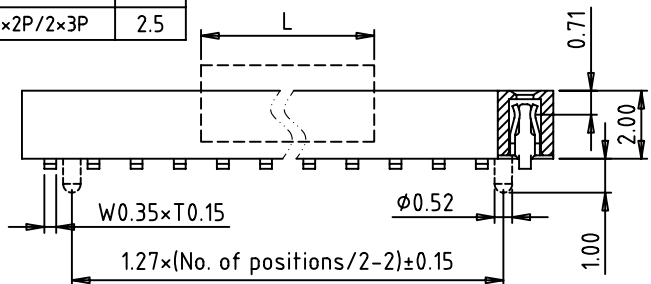

SPECIFICATIONS

Contact: phosphor bronze
 Contact plating: see ordering information
 Insulator: black glass filled polyester
 UL94V-0
 Current rating: 1.0Amps
 Contact resistance: 20m Ω max.
 Insulation resistance: 1000M Ω min. at 100V
 Withstanding Voltage: 300V AC/minute
 Operating temperature: -55 $^{\circ}$ C to +105 $^{\circ}$ C
 Soldering temperature: 260 $^{\circ}$ C \pm 5 $^{\circ}$ S
 Critical Dimensions: ∇

Ordering Information

FH127020VS1U - 2XX X X X 01

No. of pins
 2*3-2*50
 Plating Option
 A = Gold Flash
 B = 3U" Gold
 C = 5U" Gold
 E = 15U" Gold
 T = Tin
 Z = Special
 Insulator Material
 Option
 A = PBT
 B = PAGT
 F = LCP
 Z = Special
 Packing Option
 A = Tray
 B = Bag
 C = Tube
 Z = Special

TM-LINK

TM-Link Technology Limited

TITLE: 1.27mm Female Header Dual row SMT

TOLERANCES UNLESS OTHERWISE SPECIFIED:		DRAWN	Robert	DATE:	2012-03-28	DRAWING NO.:	FH127020VS1U-2XX-01	
X.XX	± 0.25	CHECKED	Jhon	PROJECTION				
X.X	± 0.35	APPROVED	Jack	SIZE:	A4	UNIT:	MM	SCALE: 1:1
X.	± 0.50					SHEET:	1/1	REV: A