
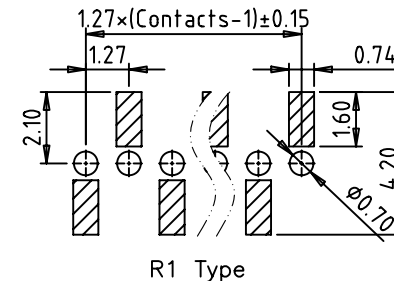
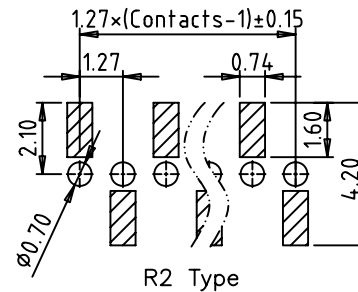

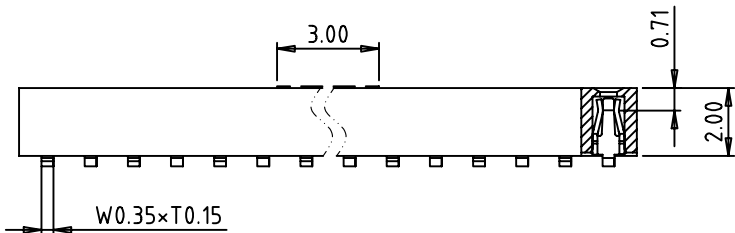
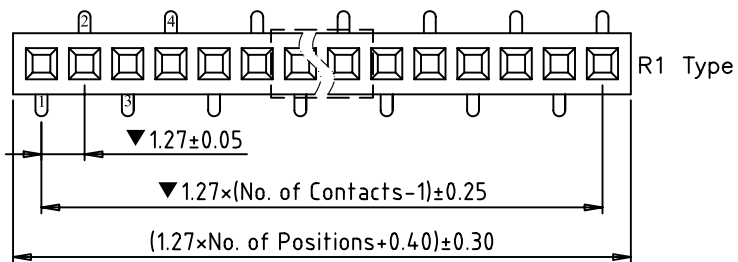


RoHS compliant



Recommended P.C.B
Layout(±0.05)

SPECIFICATIONS

Contact: phosphor bronze
 Contact plating: see ordering information
 Insulator: black glass filled polyester
 UL94V-0

Current rating: 1.0Amps
 Contact resistance: 20mΩ max.
 Insulation resistance: 1000MΩ min. at 100V
 Withstanding Voltage: 300V AC/minute
 Operating temperature: -55°C to +105°C
 Soldering temperature: 245°C ± 5° 5S
 Critical Dimensions: ▼

Ordering Information

FH127020VSXU - 1XX X X X 01

No. of pins 1*2-1*50

Plating Option
 A = Gold Flash
 B = 30" Gold
 C = 50" Gold
 E = 15U" Gold
 T = Tin
 Z = Special

Insulator Material Option
 A = PBT
 B = PAGT
 F = LCP
 Z = Special

Packing Option
 A = Tray
 B = Bag
 C = Tube
 Z = Special

TM-LINK

TM-Link Technology Limited

TITLE: 1.27mm Female Header Single row SMT

TOLERANCES UNLESS OTHERWISE SPECIFIED:	DRAWN	Robert	DATE:	2012-03-28	DRAWING NO.:	FH127020VSXU-1XX-01
X.XX ±0.25	CHECKED	Jhon	PROJECTION			
X.X ±0.35	APPROVED	Jack	SIZE:	A4		
X. ±0.50			SCALE:	1:1	SHEET:	1/1
X.X° ±2°			REV:	A		
X.° ±3°						