

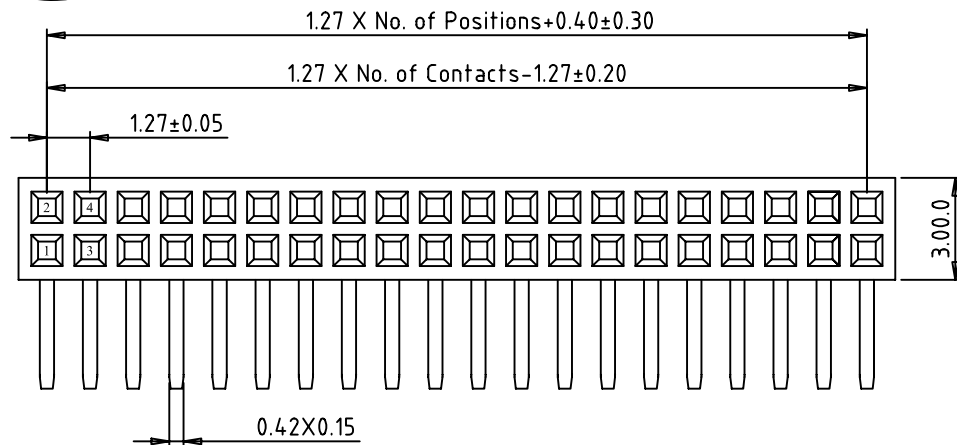


RoHS compliant




**SPECIFICATIONS**

Contact: phosphor bronze  
 Contact plating: see ordering information  
 Insulator: black glass filled polyester UL94V-0  
 Current rating: 1.0Amps  
 Contact resistance: 20mΩ max.  
 Insulation resistance: 1000MΩ min. at 100V  
 Withstanding Voltage: 300V AC/minute  
 Operating temperature: -55°C to +105°C  
 Soldering temperature: 245°C ± 5° 5S  
 Critical Dimensions: ▼

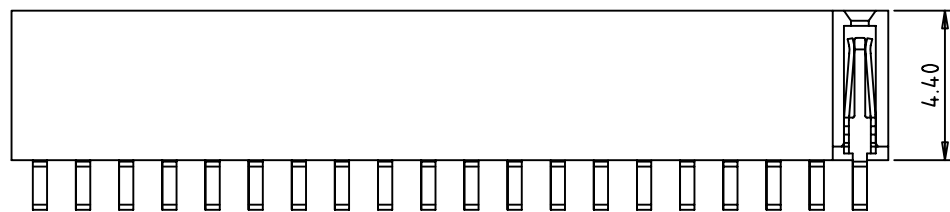

Recommended P.C.B  
 Layout(±0.05)

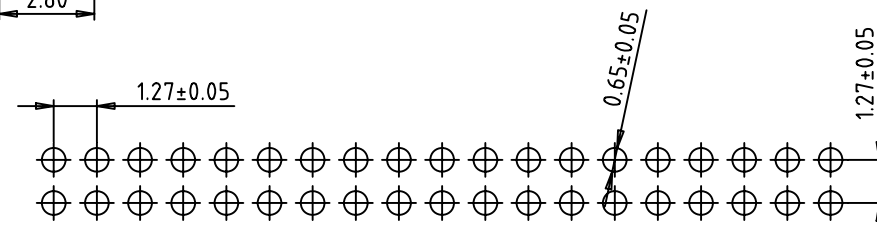

**Ordering Information**

**FH127044RU1 - 2XX X X X 01**

No. of pins 2x2-2x50  
 Plating Option A = Gold Flash B = 30" Gold C = 50" Gold E = 15U" Gold T = Tin Z = Special  
 Insulator Material Option A = PBT B = PAGT F = LCP Z = Special  
 Packing Option A = Tray B = Bag C = Tube Z = Special

**TM-LINK**

TM-Link Technology Limited

TITLE: 1.27mm Female Header Dual row Right angle type

TOLERANCES UNLESS OTHERWISE SPECIFIED:	DRAWN	Robert	DATE:	2012-03-28	DRAWING NO.:	FH127044RU1-2XX-01	
X.XX ±0.25	CHECKED	Jhon	PROJECTION				
X.X ±0.35	APPROVED	Jack	SIZE:	A4			
X. ±0.50			SCALE:	1:1	SHEET:	1/1	REV: A