

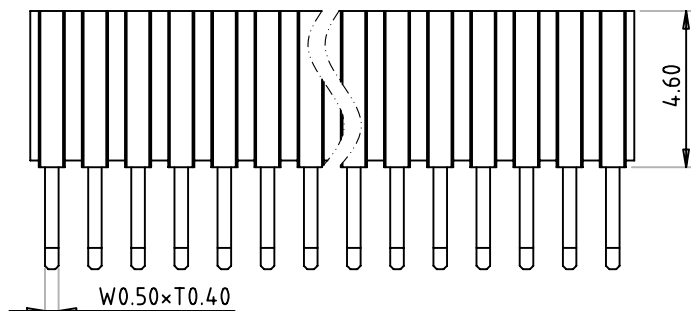



RoHS
compliant

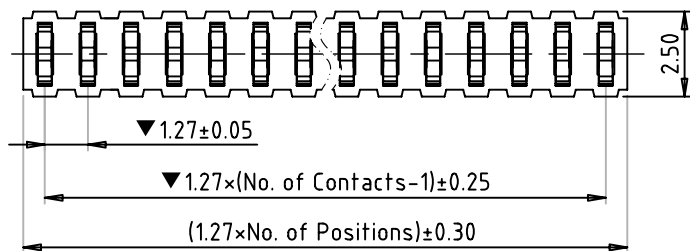

SPECIFICATIONS

Contact: phosphor bronze
 Contact plating: see ordering information
 Insulator: black glass filled polyester
 UL94V-0
 Current rating: 1.0Amps
 Contact resistance: 20mΩ max.
 Insulation resistance: 1000MΩ min. at 100V
 Withstanding Voltage: 300V AC/minute
 Operating temperature: -55°C to +105°C
 Soldering temperature: 245°C±5° 5S
 Critical Dimensions: ▼

Recommended P.C.B
 Layout(±0.05)

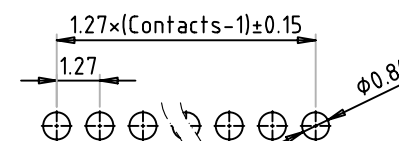

Ordering Information

FH127046DY1 - 1XX X X X 01

No. of pins 1*2-1*50
 Plating Option A = Gold Flash B = 30" Gold C = 50" Gold E = 15U" Gold T = Tin Z = Special
 Insulator Material Option A = PBT B = PAGT F = LCP Z = Special
 Packing Option A = Tray B = Bag C = Tube Z = Special

TM-LINK

TM-Link Technology Limited

| | | | | | | | |
|--|----------|--|------------|------------|--------------|--------------------|--|
| TITLE: | | 1.27mm Female Header Single row Dip type | | | | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | DRAWN | Robert | DATE: | 2012-03-28 | DRAWING NO.: | FH127046DY1-1XX-01 | |
| X.XX ±0.25 | CHECKED | Jhon | PROJECTION | | | | |
| X.X ±0.35 | APPROVED | Jack | SIZE: | A4 | UNIT: | MM | |
| X. ±0.50 | | | SCALE: | 1:1 | SHEET: | 1/1 | |
| | | | | | REV: | A | |