
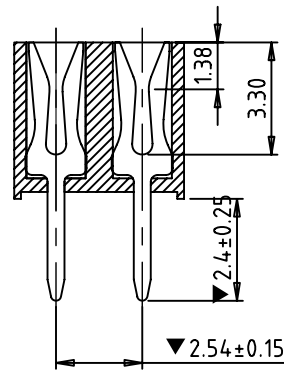
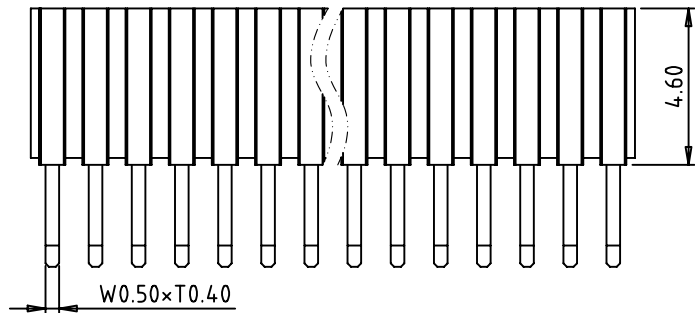



RoHS
compliant

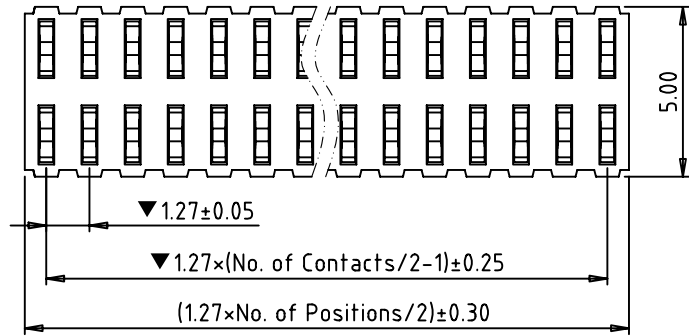

SPECIFICATIONS

Contact:	phosphor bronze
Contact plating:	see ordering information
Insulator:	black glass filled polyester UL94V-0
Current rating:	1.0Amps
Contact resistance:	20mΩ max.
Insulation resistance:	1000MΩ min. at 100V
Withstanding Voltage:	300V AC/minute
Operating temperature:	-55°C to+105°C
Soldering temperature:	245°C±5° 5S
Critical Dimensions:	▼

Recommended P.C.B
Layout(±0.05)

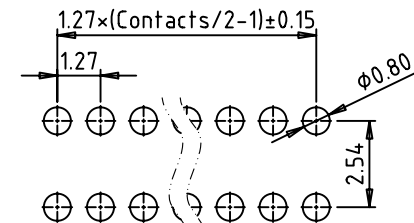

Ordering Information

FH127046DY1 - 2XX X X X 01

No. of pins 2×2-2×50	Plating Option A = Gold Flash B = 3U" Gold C = 5U" Gold E = 15U" Gold T = Tin Z = Special	Insulator Material Option A = PBT B = PAGT F = LCP Z = Special	Packing Option A = Tray B = Bag C = Tube Z = Special
-------------------------	---	---	--

TM-LINK

TM-Link Technology Limited

TITLE:		1.27mm Female Header Single row Dip type					
TOLERANCES UNLESS OTHERWISE SPECIFIED:	DRAWN	Robert	DATE:	2012-03-28	DRAWING NO.:	FH127046DY1-2XX-01	
X.XX ±0.25	CHECKED	Jhon	PROJECTION				
X.X ±0.35	APPROVED	Jack	SIZE:	A4			UNIT:
X. ±0.50			SCALE:	1:1	SHEET:	1/1	
					REV:	A	