


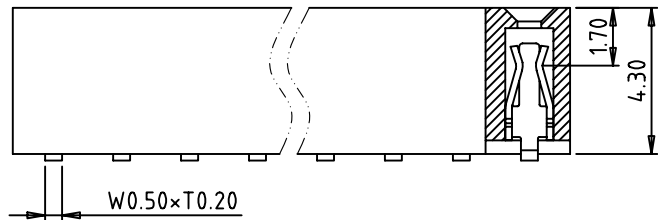


RoHS compliant

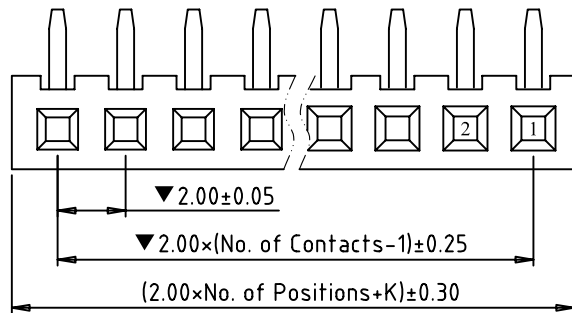

Recommended P.C.B
Layout (± 0.05)



SPECIFICATIONS

Contact: phosphor bronze
 Contact plating: see ordering information
 Insulator: black glass filled polyester UL94V-0
 Current rating: 1.5Amps
 Contact resistance: 20m Ω max.
 Insulation resistance: 1000M Ω min. at 100V
 Withstanding Voltage: 450V AC/minute
 Operating temperature: -55 $^{\circ}$ C to +105 $^{\circ}$ C
 Soldering temperature: 245 $^{\circ}$ C \pm 5 $^{\circ}$ S
 Critical Dimensions: ∇

Ordering Information

FH200043R1U - 1XX X X X 01

No. of pins 1*2-1*40
 Plating Option
 A = Gold Flash
 B = 3U" Gold
 C = 5U" Gold
 E = 15U" Gold
 T = Tin
 Z = Special
 Insulator Material Option
 A = PBT
 B = PAGT
 F = LCP
 Z = Special
 Packing Option
 A = Tray
 B = Bag
 C = Tube
 Z = Special

TM-LINK

TM-Link Technology Limited

TITLE: 2.00mm Female Header Single row Right angle type

TOLERANCES UNLESS OTHERWISE SPECIFIED:		DRAWN	Robert	DATE:	2012-03-28	DRAWING NO.:	FH200043R1U-1XX-01	
X.XX	± 0.25	CHECKED	Jhon	PROJECTION				
X.X	± 0.35	APPROVED	Jack	SIZE:	A4	UNIT:	MM	SCALE: 1:1
X.	± 0.50					SHEET:	1/1	REV: A