
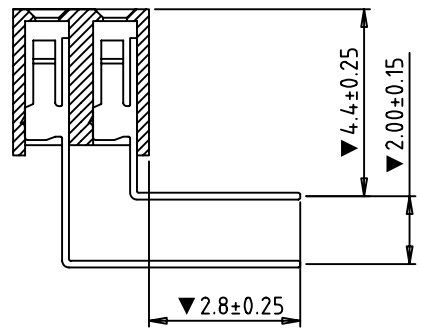
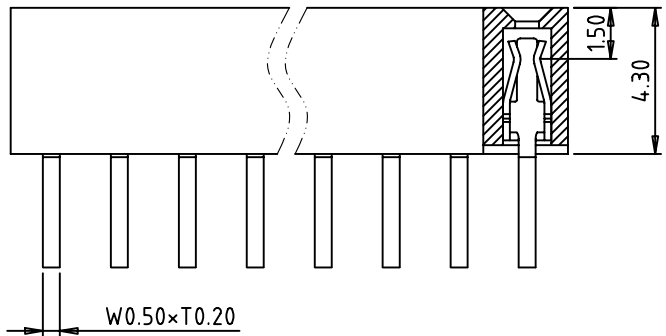


RoHS compliant

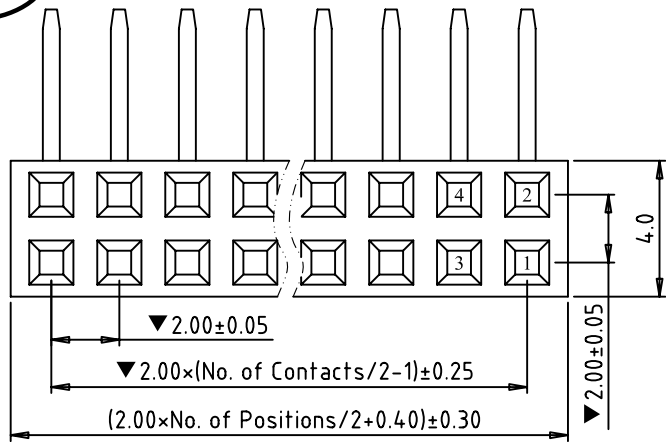


**SPECIFICATIONS**

Contact: phosphor bronze  
 Contact plating: see ordering information  
 Insulator: black glass filled polyester UL94V-0

Current rating: 1.5Amps  
 Contact resistance: 20mΩ max.  
 Insulation resistance: 1000MΩ min. at 100V  
 Withstanding Voltage: 450V AC/minute  
 Operating temperature: -55°C to +105°C  
 Soldering temperature: 245°C±5° 5S  
 Critical Dimensions: ▼

Recommended P.C.B  
 Layout(±0.05)

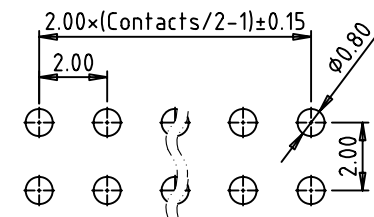

**Ordering Information**

**FH200043R1U - 2XX X X X 01**

No. of pins 2×2-2×40  
 Plating Option A = Gold Flash B = 3U" Gold C = 5U" Gold E = 15U" Gold T = Tin Z = Special  
 Insulator Material Option A = PBT B = PAGT F = LCP Z = Special  
 Packing Option A = Tray B = Bag C = Tube Z = Special

**TM-LINK**

TM-Link Technology Limited

TITLE:		2.00mm Female Header Dual row Right angle type					
TOLERANCES UNLESS OTHERWISE SPECIFIED:	DRAWN	Robert	DATE:	2012-03-28	DRAWING NO.:	FH200043R1U-2XX-01	
X.XX ±0.25	CHECKED	Jhon	PROJECTION				
X.X ±0.35	APPROVED	Jack	SIZE:	A4	UNIT:	MM	
X. ±0.50			SCALE:	1:1	SHEET:	1/1	
					REV:	A	