


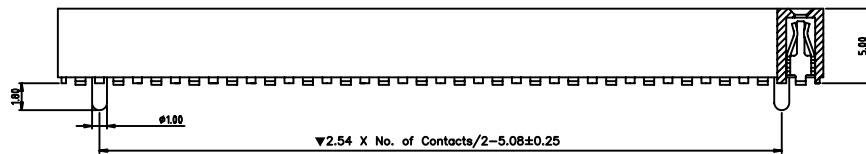


RoHS  
compliant

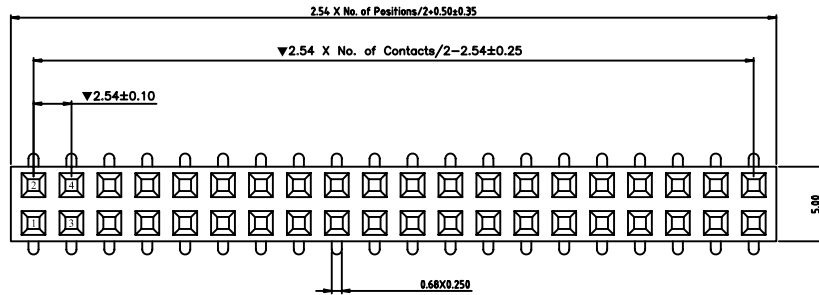

Recommended P.C.B  
Layout(±0.05)

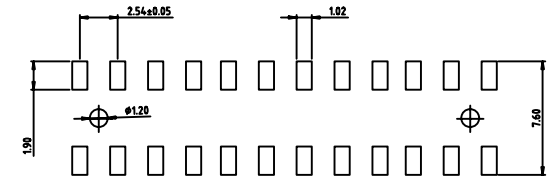

**SPECIFICATIONS**

Contact: phosphor bronze  
 Contact plating: see ordering information  
 Insulator: black glass filled polyester  
 UL94V-0  
 Current rating: 3.0Amps  
 Contact resistance: 20mΩ max.  
 Insulation resistance: 1000MΩ min. at 100V  
 Withstanding Voltage: 550V AC/minute  
 Operating temperature: -55°C to+105°C  
 Soldering temperature: 260°C±5° 5S  
 Critical Dimensions: ▼

**Ordering Information**

**FH254050VS1U - 2XX X X X 01P**

No. of pins  
2\*3-2\*40

Plating Option  
A = Gold Flash  
B = 3U" Gold  
C = 5U" Gold  
E = 15U" Gold  
T = Tin  
Z = Special

Insulator Material  
Option  
A = PBT  
B = PAGT  
F = LCP  
Z = Special

Packing Option  
A = Tray  
B = Bag  
C = Tube  
Z = Special

**TM-LINK**

TM-Link Technology Limited

TITLE: 2.54mm Female Header Dual row Vertical SMT

TOLERANCES UNLESS OTHERWISE SPECIFIED:		DRAWN	Robert	DATE:	2012-03-28	DRAWING NO.:	FH254050VS1U-2XX-01P	
X.XX ±0.25	X.X° ±2°	CHECKED	Jhon	PROJECTION				
X.X ±0.35	X.° ±3°	APPROVED	Jack	SIZE:	A4	UNIT:	MM	SCALE: 1:1
X. ±0.50						SHEET:	1/1	REV: A