
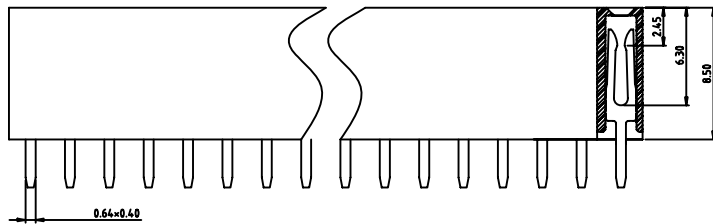



RoHS
compliant

SPECIFICATIONS

Contact: phosphor bronze
 Contact plating: see ordering information
 Insulator: black glass filled polyester
 UL94V-0
 Current rating: 3.0Amps
 Contact resistance: 20mΩ max.
 Insulation resistance: 1000MΩ min. at 100V
 Withstanding Voltage: 550V AC/minute
 Operating temperature: -55°C to +105°C
 Soldering temperature: 245°C ± 5° 5S
 Critical Dimensions: ▼

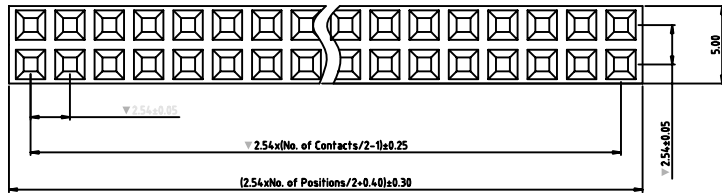

Recommended P.C.B
 Layout(±0.05)

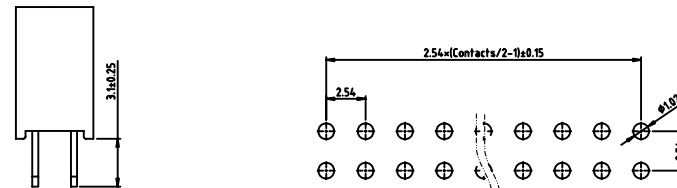

Ordering Information

FH254085D1Y - 2XX X X X 01

- No. of pins
1*2-1*40
- Plating Option
A = Gold Flash
B = 30" Gold
C = 50" Gold
E = 15U" Gold
T = Tin
Z = Special
- Insulator Material
Option
A = PBT
B = PAGT
F = LCP
Z = Special
- Packing Option
A = Tray
B = Bag
C = Tube
Z = Special

TM-LINK

TM-Link Technology Limited

TITLE: 2.54mm Female Header Dual row Dip type

TOLERANCES UNLESS OTHERWISE SPECIFIED:	DRAWN	Robert	DATE:	2012-03-28	DRAWING NO.:	FH254085D1Y-2XX-01		
X.XX ±0.25	CHECKED	Jhon	PROJECTION					
X.X ±0.35	APPROVED	Jack	SIZE:	A4				UNIT:
X. ±0.50			SCALE:	1:1	SHEET:	1/1	REV:	A