

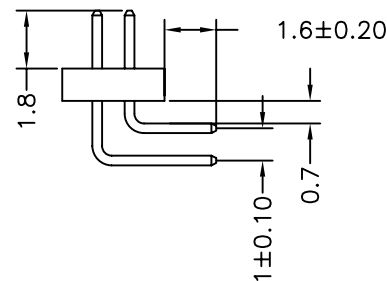


RoHS
compliant

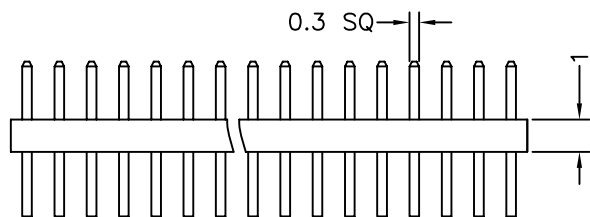

Recommended P.C.B Layout

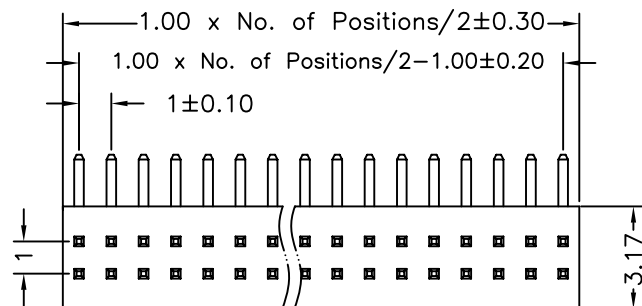

Specification:

Material:

Contact Material: Brass

Contact plating: Au or Sn Over 50µ" Ni

Insulator Material: Black Polyester UL94V-0

Standard: LCP+30%G.F

Electrical:

Current rating: 0.75Amps/contact max.

Contact resistance: ≤20mΩ/contact

Insulation resistance: ≥1000MΩ at V=100V

Withstanding Voltage: 300V AC/minute

Mechanical:


Mechanical life cycle: min.200

Operating temperatures: Gold Plated: -55°C to +105°C

Tin plated: -40°C to +105°C

Soldering temperature: +260°C, 10s max.

Ordering Information

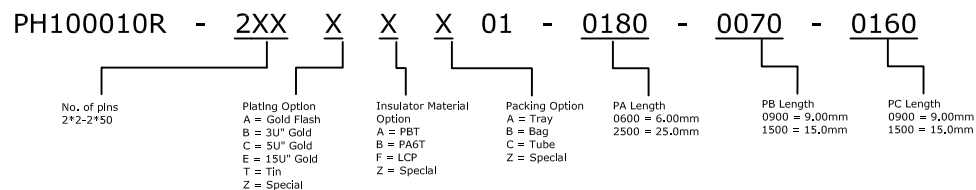

TM-LINK

TM-Link Technology Limited

TITLE: 1.0mm Pin Header Dual row Right angle type

TOLERANCES UNLESS OTHERWISE SPECIFIED:	DRAWN	Robert	DATE:	2012-03-28	DRAWING NO.:	PH100010R-2XX-01
X.XX ±0.25	CHECKED	Jhon	PROJECTION			
X.X ±0.35	APPROVED	Jack	SIZE:	A4		
X. ±0.50					SCALE:	1:1
					SHEET:	1/1
					REV:	A