

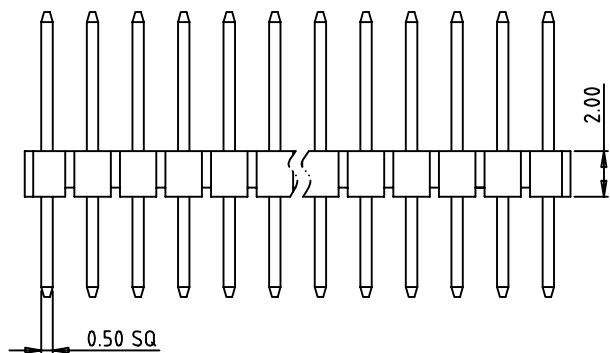


RoHS compliant

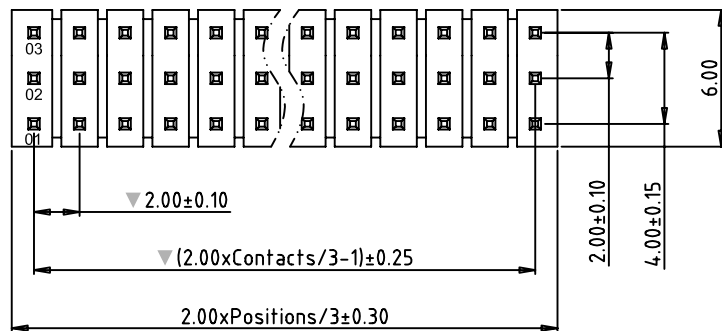


Specification:

Material:
 Contact Material: Brass
 Contact plating: Au or Sn Over 50μ" Ni
 Insulator Material: Black Polyester UL94V-0
 Standard: LCP+30%G.F

Electrical:
 Current rating: 1.5Amps/contact max.
 Contact resistance: ≤20mΩ/contact
 Insulation resistance: ≥1000MΩ at V=100V
 Withstanding Voltage: 450V AC/minute


Mechanical:
 Mechanical life cycle: min.200
 Operating temperatures: -45°C to +105°C
 Soldering temperature: +245°C, 5s.

Recommended P.C.B Layout

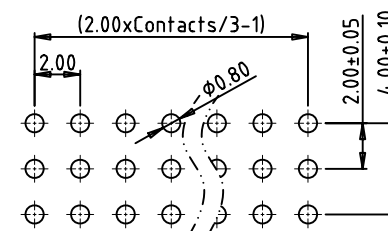

Recommended P.C.B Layout(±0.05)

Ordering Information

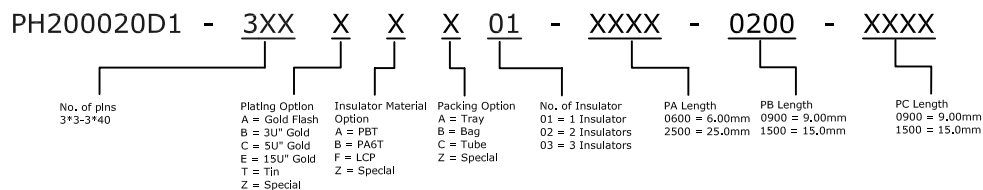

TM-LINK

TM-Link Technology Limited

TITLE:		2.00mm Pin Header Triple row Dip type					
TOLERANCES UNLESS OTHERWISE SPECIFIED:	DRAWN	Robert	DATE:	2012-03-28	DRAWING NO.:	PH200020D1-3XX-01	
X.XX ±0.25	CHECKED	Jhon	PROJECTION				
X.X ±0.35	APPROVED	Jack	SIZE:	A4			UNIT:
X. ±0.50			SCALE:	1:1	SHEET:	1/1	
					REV:	A	