




RoHS
compliant

Specification:


Material:
 Contact Material: Brass
 Contact plating: Au or Sn Over 50μ" Ni
 Insulator Material: Black Polyester UL94V-0
 Standard: LCP+30%G.F

Electrical:
 Current rating: 3Amps/contact max.
 Contact resistance: $\leq 20\text{m}\Omega$ /contact
 Insulation resistance: $\geq 1000\text{M}\Omega$ at V=100V
 Withstanding Voltage: 300V AC/minute

Mechanical:
 Mechanical life cycle: min.200
 Operating temperatures: -45°C to +105°C
 Soldering temperature: +245°C, 5s.

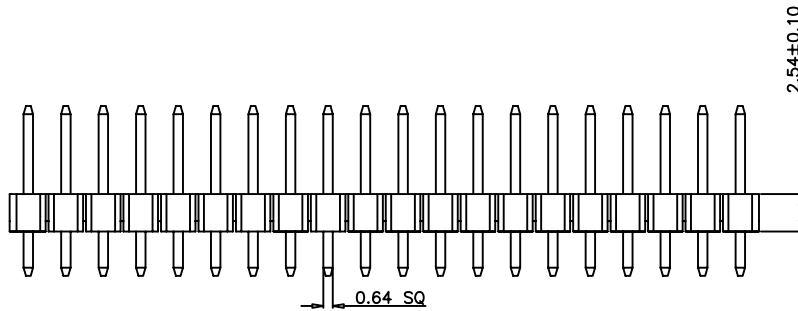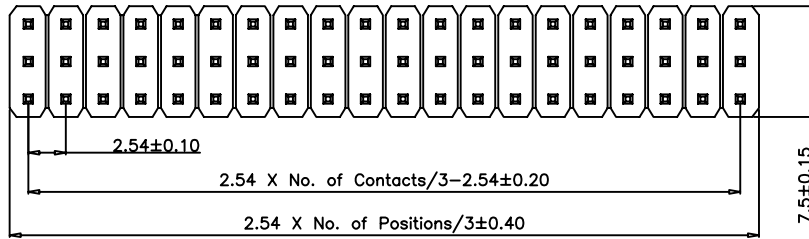

Recommended P.C.B
 Layout(±0.05)

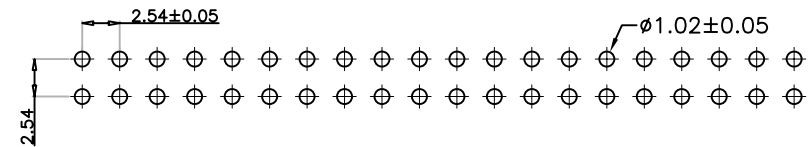

Ordering Information

PH254254D1 - 3XX X X X 01 - 0600 - 0254 - 0300

No. of pins
3*3-3*40

Plating Option
 A = 3U" Gold
 B = 5U" Gold
 C = 15U" Gold
 E = 15U" Gold
 T = Tin
 Z = Special

Insulator Material
 Option
 A = PBT
 B = PA6T
 F = LCP
 Z = Special

Packing Option
 A = Tray
 B = Bag
 C = Tube
 Z = Special

No. of Insulator
 01 = 1 Insulator
 02 = 2 Insulators
 03 = 3 Insulators

PA Length
 0600 = 6.00mm
 2500 = 25.0mm

PB Length
 0900 = 9.00mm
 1500 = 15.0mm

PC Length
 0900 = 9.00mm
 1500 = 15.0mm

TM-LINK

TM-Link Technology Limited

TITLE:		2.54mm Pin Header Triple row Dip type					
TOLERANCES UNLESS OTHERWISE SPECIFIED:	DRAWN	Robert	DATE:	2012-03-28	DRAWING NO.:	PH254250DX-2XX-XX	
X.XX ±0.25	CHECKED	Jhon	PROJECTION				
X.X ±0.35	APPROVED	Jack	SIZE:	A4	UNIT:	MM	
X. ±0.50			SCALE:	1:1	SHEET:	1/1	
X.X° ±2°			REV:	A			
X.° ±3°							